



**DC COMPONENTS CO., LTD.**

RECTIFIER SPECIALISTS

**SM5817S**

**THRU**

**SM5819S**

**TECHNICAL SPECIFICATIONS OF SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER**

**VOLTAGE RANGE - 20 to 40 Volts**

**CURRENT - 1.0 Ampere**

**FEATURES**

- \* High current capability
- \* Ideal for surface mounted applications
- \* Low leakage current for high efficiency

**MECHANICAL DATA**


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Terminals: Solder plated solderable per MIL-STD-202E, Method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.036 gram

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.



SM-2(DO-213AA)

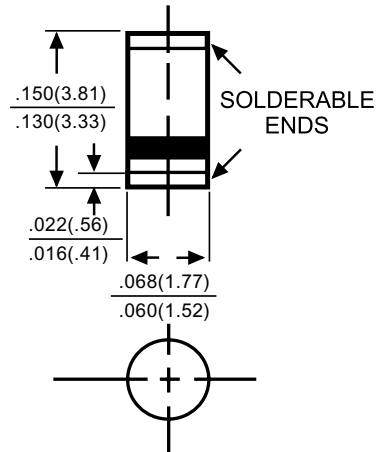

Dimensions in inches and (millimeters)

	SYMBOL	SM5817S	SM5818S	SM5819S	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	30	40	Volts
Maximum Average Forward Rectified Current at T <sub>A</sub> =90°C	I <sub>O</sub>	1.0			Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	25			Amps
Maximum Instantaneous Forward Voltage at 1.0A DC	V <sub>F</sub>	.50	.55	.60	Volts
Maximum DC Reverse Current at @T <sub>A</sub> = 25°C	I <sub>R</sub>	1.0			mAmps
Rated DC Blocking Voltage @T <sub>A</sub> = 100°C		10			
Typical Thermal Resistance (Note1)	R <sub>θJA</sub>	75			°C/W
Typical Junction Capacitance (Note 2)	C <sub>J</sub>	110			pF
Storage Operating Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-65 to + 125			°C

NOTES : 1. Thermal Resistance (Junction to Ambient), .24in<sup>2</sup> (6.0mm<sup>2</sup>) copper pads to each terminal.  
 2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

