



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

SA5.0
THRU
SA220CA

TECHNICAL SPECIFICATIONS OF TRANSIENT VOLTAGE SUPPRESSOR

VOLTAGE RANGE - 5.0 to 220Volts PEAK PULSE POWER - 500 Watts

FEATURES


- * Glass passivated junction
- * 500 Watts Peak Pulse Power capability on 10/1000 μ s waveform
- * Excellent clamping capability
- * Low zener impedance
- * Fast response time

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: MIL-STD-202E, Method 208 guaranteed
- * Polarity: Color band denotes positive end (cathode) except bidirectional types
- * Mounting position: Any
- * Weight: 0.4 gram



DO-15

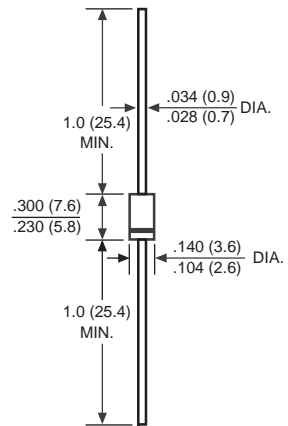

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load,
For capacitive load, derate current by 20%.

DEVICES FOR BIPOLAR APPLICATIONS

For Bidirectional use C or CA suffix (e.g. SA5.0C, SA220CA).

Electrical characteristics apply in both directions

	SYMBOL	VALUE	UNITS
Peak Pulse Power Dissipation on 10/1000 μ s waveform (Note 1, FIG. 1)	PPPM	Minimum 500	Watts
Steady State Power Dissipation at T = 75°C Lead Lengths .375" (9.5mm) (Note 2)	P _{M(AV)}	1.0	Watts
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) (Note 3)	I _{FSM}	70	Amps
Maximum Instantaneous Forward Voltage at 50A for Unidirectional only	V _F	3.5	Volts
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to + 175	°C

- NOTES : 1. Non-repetitive current pulse, per Fig. 3 and derated above TA = 25°C per Fig. 2.
2. Mounted on Copper Leaf area of 1.6 X 1.6" (40 X 40mm) per Fig. 5
3. 8.3ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.

RATING AND CHARACTERISTIC CURVES (SA5.0 THRU SA220CA)

FIG. 1 - PEAK PULSE POWER RATING CURVE

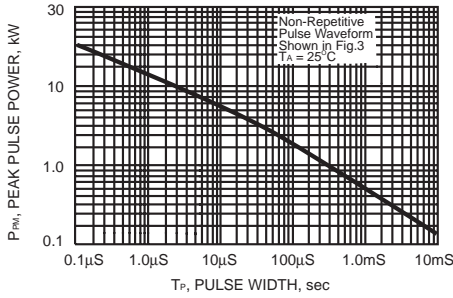


FIG. 2 - PULSE DERATING CURVE

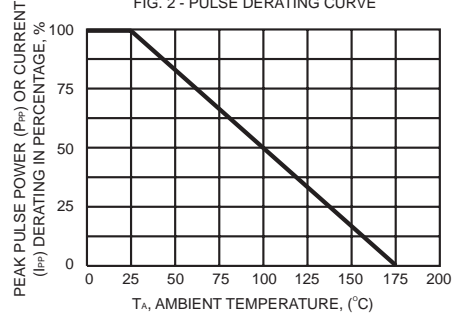


FIG. 3 - PULSE WAVEFORM

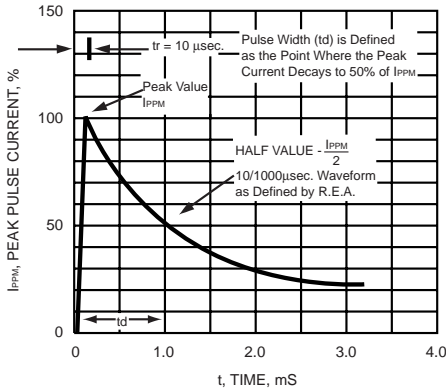


FIG. 4 - TYPICAL JUNCTION CAPACITANCE

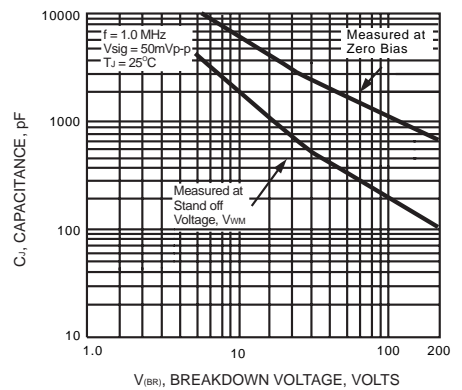


FIG. 5 - STEADY STATE POWER DERTING CURVE

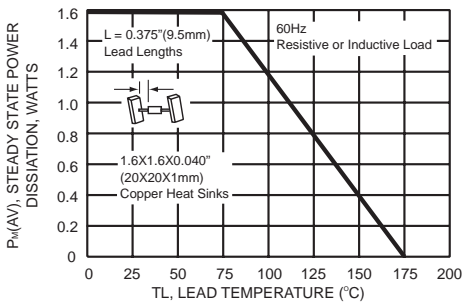


FIG. 6 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT UNIDIRECTIONAL


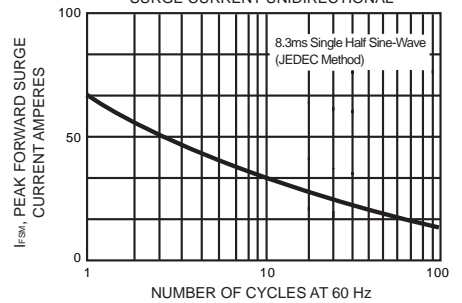


FIG. 7 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS

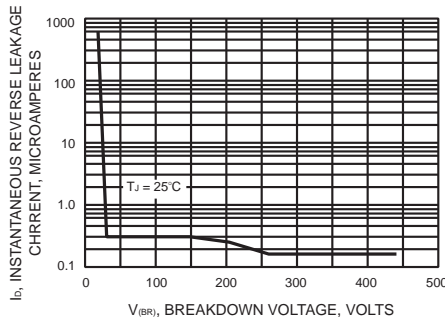

SA (500W) SERIES TRANSIENT VOLTAGE SUPPRESSORS

TYPE	Reverse Stand-off Voltage	Breakdown Voltage @ I _T		Test Current	Maximum Reverse Leakage @ V _{RWM}		Maximum Clamping Voltage @ I _{PP}	Maximum Peak Pulse Current
		V _{BR}			I _T	I _R		
	V _{RWM}	Min.	Max.	UNI- μA		BI- μA	V _c	I _{PP}
	V	V	V	mA		V	A	
SA5.0	5.0	6.40	7.55	10	600	1200	9.6	52.3
SA5.0A	5.0	6.40	7.25	10	600	1200	9.2	54.3
SA6.0	6.0	6.67	8.45	10	600	1200	11.4	43.9
SA6.0A	6.0	6.67	7.67	10	600	1200	10.3	48.5
SA6.5	6.5	7.22	9.14	10	400	800	12.3	40.7
SA6.5A	6.5	7.22	8.30	10	400	800	11.2	44.7
SA7.0	7.0	7.78	9.86	10	150	300	13.3	37.8
SA7.0A	7.0	7.78	8.95	10	150	300	12.0	41.7
SA7.5	7.5	8.33	10.67	1	50	100	14.3	35.0
SA7.5A	7.5	8.33	9.58	1	50	100	12.9	38.8
SA8.0	8.0	8.89	11.30	1	25	50	15.0	33.3
SA8.0A	8.0	8.89	10.23	1	25	50	13.6	36.7
SA8.5	8.5	9.44	11.92	1	10	20	15.9	31.4
SA8.5A	8.5	9.44	10.82	1	10	20	14.4	34.7
SA9.0	9.0	10.0	12.6	1	5	10	16.9	29.5
SA9.0A	9.0	10.0	11.5	1	5	10	15.4	32.5
SA10	10	11.1	14.1	1	3		18.8	26.6
SA10A	10	11.1	12.8	1	3		17.0	29.4
SA11	11	12.2	15.4	1	3		20.1	24.9
SA11A	11	12.2	14.0	1	3		18.2	27.4
SA12	12	13.3	16.9	1	3		22.0	22.7
SA12A	12	13.3	15.3	1	3		19.9	25.1
SA13	13	14.4	18.2	1	3		23.8	21.0
SA13A	13	14.4	16.5	1	3		21.5	23.2
SA14	14	15.6	19.8	1	3		25.8	19.4
SA14A	14	15.6	17.9	1	3		23.2	21.5
SA15	15	16.7	21.1	1	3		26.9	18.8
SA15A	15	16.7	19.2	1	3		24.4	20.6
SA16	16	17.8	22.6	1	3		28.8	17.6
SA16A	16	17.8	20.5	1	3		26.0	19.2
SA17	17	18.9	23.9	1	3		30.5	16.4
SA17A	17	18.9	21.7	1	3		27.6	16.1
SA18	18	20.0	25.3	1	3		32.2	15.5
SA18A	18	20.0	23.3	1	3		29.2	17.2
SA20	20	22.2	28.1	1	3		35.8	13.9
SA20A	20	22.2	25.5	1	3		32.4	15.4
SA22	22	24.4	30.9	1	3		39.4	12.7
SA22A	22	24.4	28.0	1	3		35.5	14.1
SA24	24	26.7	33.8	1	3		43.0	11.6
SA24A	24	26.7	30.7	1	3		38.9	12.8
SA26	26	28.9	36.6	1	3		46.6	10.7
SA26A	26	28.9	33.2	1	3		42.1	11.9
SA28	28	31.1	39.4	1	3		50.0	9.9
SA28A	28	31.1	35.8	1	3		45.4	11.0
SA30	30	33.3	42.2	1	3		53.5	9.3
SA30A	30	33.3	38.3	1	3		48.4	10.3
SA33	33	36.7	46.5	1	3		59.0	5.8
SA33A	33	36.7	42.2	1	3		53.3	9.4
SA36	36	40.0	50.7	1	3		64.3	7.8
SA36A	36	40.0	46.0	1	3		58.1	8.6
SA40	40	44.4	56.3	1	3		71.4	7.0
SA40A	40	44.4	51.1	1	3		64.5	7.8

SA (500W) SERIES TRANSIENT VOLTAGE SUPPRESSORS

TYPE	Reverse Stand-off Voltage	Breakdown Voltage @ I _T		Test Current	Maximum Reverse Leakage @ V _{RWM}		Maximum Clamping Voltage @ I _{PP}	Maximum Peak Pulse Current
	V _{RWM} V	V _{BR}			I _T mA	I _R		
		Min.	Max.	UNI-		BI-		
		V	V	μA		μA		
SA43	43	47.8	60.5	1	3	76.7	6.5	
SA43A	43	47.8	54.9	1	3	69.4	7.2	
SA45	45	50.0	63.3	1	3	80.3	6.2	
SA45A	45	50.0	57.5	1	3	72.7	6.9	
SA48	48	53.3	67.5	1	3	85.5	5.8	
SA48A	48	53.3	61.3	1	3	77.4	6.5	
SA51	51	56.7	71.8	1	3	91.1	5.5	
SA51A	51	56.7	65.2	1	3	82.4	6.1	
SA54	54	60.0	76.0	1	3	96.3	5.2	
SA54A	54	60.0	69.0	1	3	87.1	5.7	
SA58	58	64.4	81.6	1	3	103.0	4.9	
SA58A	58	64.4	74.1	1	3	93.6	5.3	
SA60	60	66.7	84.5	1	3	107.0	4.7	
SA60A	60	66.7	76.7	1	3	96.8	5.2	
SA64	64	71.1	90.1	1	3	114	4.4	
SA64A	64	71.1	81.8	1	3	103	4.9	
SA70	70	77.8	98.6	1	3	125	4.0	
SA70A	70	77.8	89.5	1	3	113	4.4	
SA75	75	83.3	105.7	1	3	134	3.7	
SA75A	75	83.3	95.8	1	3	121	4.1	
SA78	78	86.7	109.8	1	3	139	3.6	
SA78A	78	86.7	99.7	1	3	126	4.0	
SA85	85	94.4	119.2	1	3	151	3.3	
SA85A	85	94.4	108.2	1	3	137	3.6	
SA90	90	100	126.5	1	3	160	3.1	
SA90A	90	100	115.5	1	3	146	3.4	
SA100	100	111	141.0	1	3	179	2.8	
SA100A	100	111	128.0	1	3	162	3.1	
SA110	110	122	154.5	1	3	196	2.6	
SA110A	110	122	140.5	1	3	177	2.8	
SA120	120	133	169.0	1	3	214	2.3	
SA120A	120	133	153.0	1	3	193	2.0	
SA130	130	144	182.5	1	3	231	2.2	
SA130A	130	144	165.5	1	3	209	2.4	
SA150	150	167	211.5	1	3	268	1.9	
SA150A	150	167	192.5	1	3	243	2.1	
SA160	160	178	226.0	1	3	287	1.7	
SA160A	160	178	205.0	1	3	259	1.9	
SA170	170	189	239.5	1	3	304	1.6	
SA170A	170	189	217.5	1	3	275	1.8	
SA180	180	198	253.8	1	3	322	1.6	
SA180A	180	198	230.4	1	3	292	1.7	
SA190	190	209	267.9	1	3	340	1.5	
SA190A	190	209	243.2	1	3	308	1.6	
SA200	200	220	282.0	1	3	358	1.4	
SA200A	200	220	256.0	1	3	324	1.5	
SA210	210	231	296.1	1	3	376	1.3	
SA210A	210	231	268.8	1	3	340	1.5	
SA220	220	242	310.2	1	3	394	1.3	
SA220A	220	242	281.6	1	3	356	1.4	

- NOTES: 1. V_{BR} measured after I_T applied for 300μs. I_T= Square Wave Pulse or equivalent.
 2. For Bidirectional use "C" or "CA" Suffix for all types (e.g.: SA5.0C, SA5.0CA, SA220C, SA220CA).
 Electrical characteristics apply in both directions.
 3. For bidirectional types having V_{RWM} of 10 volts and less, the I_D limit is doubled.

Disclaimer

Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold *DC COMPONENTS* harmless against all damages.

DC COMPONENTS disclaims any and all liability arising out of the application or use of any product, including consequential or incidental damages. Statement regarding the suitability of products for certain types of applications are based on *DC COMPONENTS*'s knowledge of typical requirements that are often placed on *DC COMPONENTS* products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

DC COMPONENTS reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein, and disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product. Parameters provided in datasheets and specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify *DC COMPONENTS*'s terms and conditions of purchase, including but not limited to the warranty expressed therein.

Unless otherwise in writing, *DC COMPONENTS* products are intended for use as general electronic components in standard applications (eg: Consumer electronic, Computer equipment, Office equipment, etc.), and not recommended for use in a high specific application where a failure or malfunction of the device could result in human injury or death (eg: Aerospace equipment, Submarine cables, Combustion equipment, Safety devices, Life support systems, etc.)

Customers using or selling *DC COMPONENTS* products not expressly indicated for use in such applications do so at their own risk. If customer intended to use *DC COMPONENTS* standard quality grade devices for applications not envisioned by *DC COMPONENTS*, please contact our sales representatives in advance.



DC COMPONENTS CO., LTD.