



DC COMPONENTS CO., LTD.

DISCRETE SEMICONDUCTORS

DMBT9014

TECHNICAL SPECIFICATIONS OF NPN EPITAXIAL PLANAR TRANSISTOR

Description


Designed for use in pre-amplifier of low level and low noise.

Pinning

- 1 = Base
- 2 = Emitter
- 3 = Collector

Absolute Maximum Ratings (TA=25°C)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V _{CB0}	50	V
Collector-Emitter Voltage	V _{CE0}	45	V
Emitter-Base Voltage	V _{EB0}	5	V
Collector Current	I _C	100	mA
Total Power Dissipation	P _D	225	mW
Junction Temperature	T _J	+150	°C
Storage Temperature	T _{STG}	-55 to +150	°C

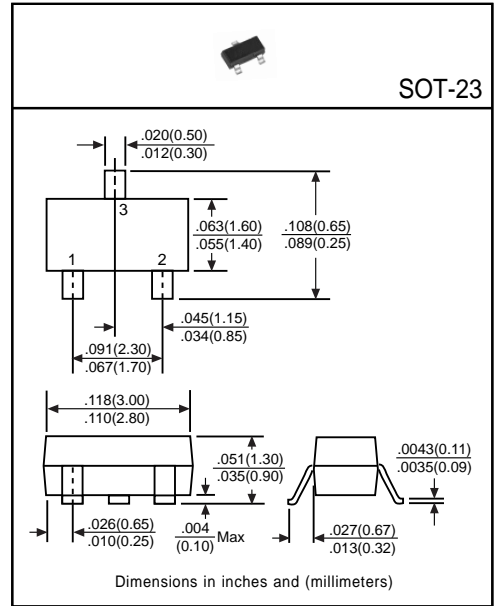

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Collector-Base Breakdown Voltage	BV _{CB0}	50	-	-	V	I _C =100μA, I _E =0
Collector-Emitter Breakdown Voltage	BV _{CE0}	45	-	-	V	I _C =1mA, I _B =0
Emitter-Base Breakdown Voltage	BV _{EB0}	5	-	-	V	I _E =100μA, I _C =0
Collector Cutoff Current	I _{CBO}	-	-	0.1	μA	V _{CB} =50V, I _E =0
Emitter Cutoff Current	I _{EBO}	-	-	0.1	μA	V _{EB} =3V, I _C =0
Collector-Emitter Saturation Voltage ⁽¹⁾	V _{CE(sat)}	-	-	0.3	V	I _C =100mA, I _B =5mA
Base-Emitter Saturation Voltage ⁽¹⁾	V _{BE(sat)}	-	-	1	V	I _C =100mA, I _B =5mA
DC Current Gain ⁽¹⁾	h _{FE}	200	-	1000	-	I _C =1mA, V _{CE} =5V
Transition Frequency	f _T	150	-	-	MHz	I _C =10mA, V _{CE} =5V


(1) Pulse Test: Pulse Width ≤ 380μs, Duty Cycle ≤ 2% MARKING: J 6

Classification of hFE


Rank	L	H
Range	200~450	450~1000

Electrical Characteristic Curves


Static Characteristic

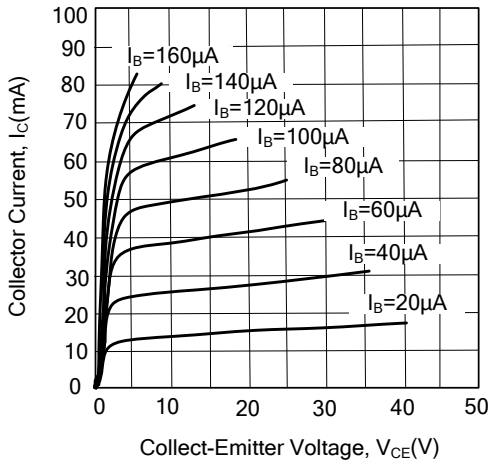

Dc Current Gain

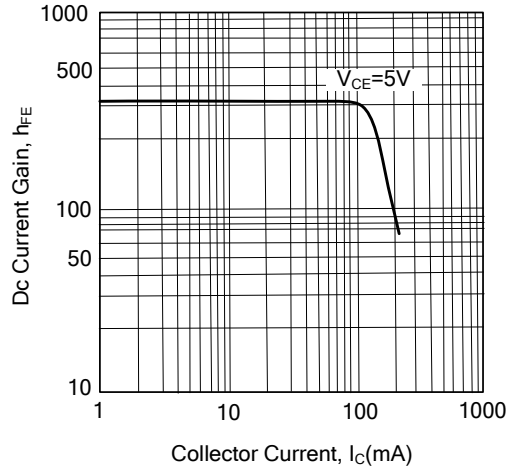

Base-Emmitter Saturation Voltage Collector Saturation Voltage

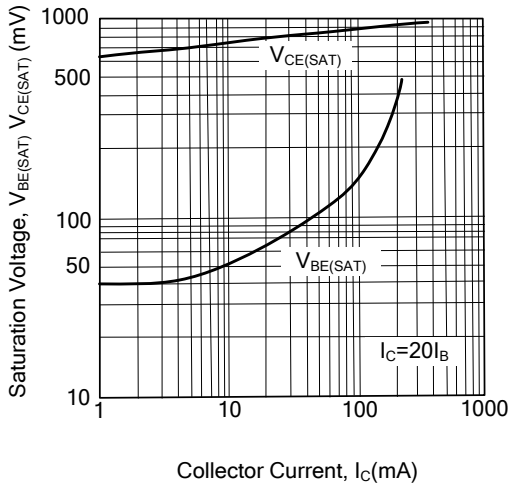

Current Gain-Bandwidth Product

