



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

FMB05F
THRU
FMB10F

TECHNICAL SPECIFICATIONS OF SURFACE MOUNT FAST RECOVERY BRIDGE RECTIFIER

VOLTAGE RANGE - 50 to 1000 Volts

CURRENT - 0.8 Ampere

FEATURES

- * High surge current capability
- * Ideal for printed circuit board
- * Glass passivated junction

MECHANICAL DATA


- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: MIL-STD-202E, Method 208 guaranteed
- * Polarity: Symbols molded or marked on body
- * Mounting position: Any
- * Weight: 0.075 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.



MBF

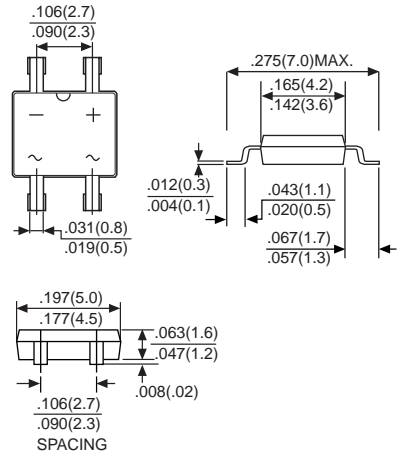

Dimensions in inches and (millimeters)

	SYMBOL	FMB05F	FMB1F	FMB2F	FMB4F	FMB6F	FMB8F	FMB10F	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Bridge Input Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Output Current at T _A =70°C (Note 1)	I _O	0.8							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	25							Amps
Maximum DC Forward Voltage Drop per Bridge Element at 0.8A DC	V _F	1.3							Volts
Maximum Reverse Current at rated DC Blocking Voltage per element	@ T _A = 25°C	5.0							µAmps
	@ T _A = 125°C	50							
Maximum Reverse Recovery Time (Note 4)	t _{rr}	150			250	500		nS	
Typical Junction Capacitance (Note 2)	C _J	12							pF
Typical Thermal Resistance (Note 3)	R _{θJA}	90							°C/W
Operating and Storage Temperature Range	T _{J,TSTG}	-50 to + 150							°C

- NOTES: 1. Mounted on P.C. board with 4x(5x5mm²) copper pad.
2. Measured at 1.0 MHZ and applied reverse voltage of 4.0V DC.
3. Thermal resistance junction to ambient.
4. Measured with I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A.

RATING AND CHARACTERISTIC CURVES (FMB05F THRU FMB10F)

FIG. 1 - MAXIMUM NON-REPETITIVE SURGE CURRENT

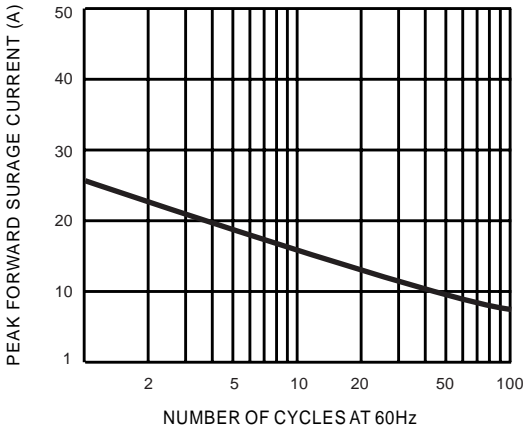


FIG. 2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

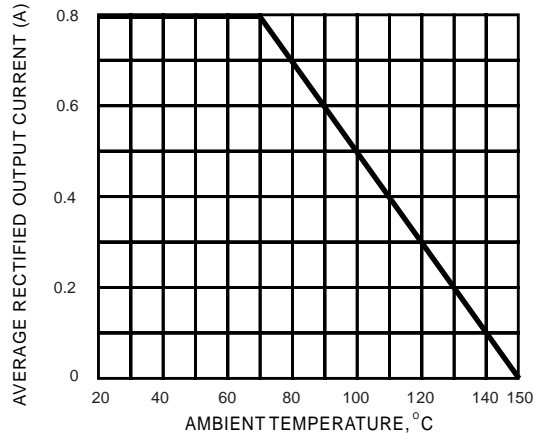


FIG. 3 - TYPICAL FORWARD CHARACTERISTICS

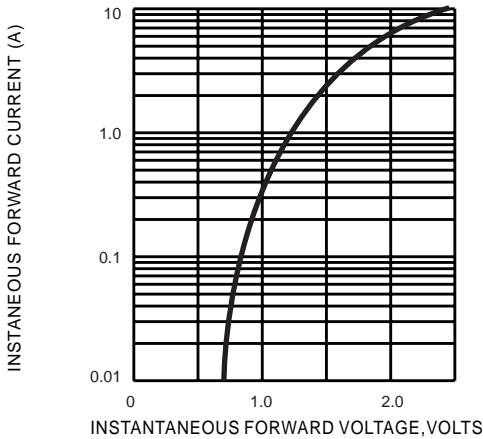


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS


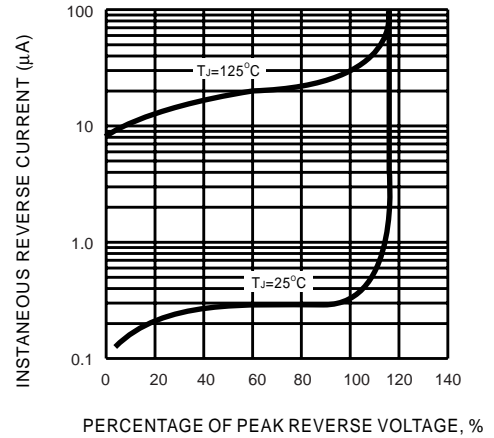


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

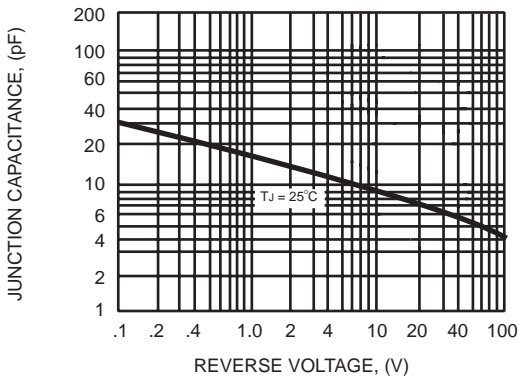

DC COMPONENTS CO., LTD.